




## 6 How to use


### When using the shower

Turn over the selector valve to the left to open the faucet of mixed water cock.

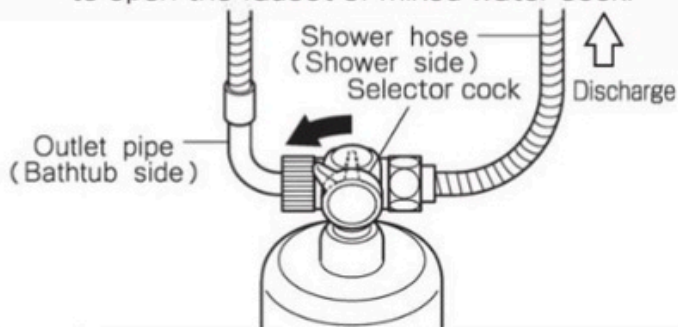

### When filling hot water (water) in bathtub

Turn over the selector valve to the right to open the faucet of mixed water cock.

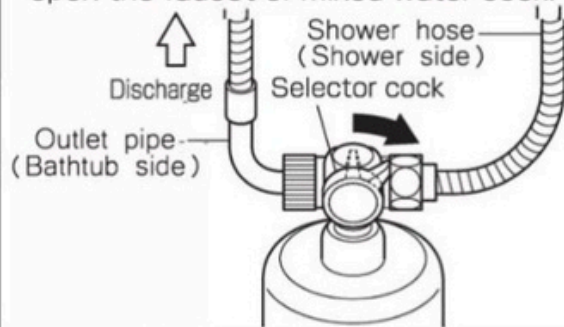

## 7 Standard specifications

### Unit

Product Name	ANESPA DX
Type	ANSP- 02
Target substance of elimination	Residual chlorine removal
Filtering performance	Residual chlorine removal ( 0.07gr/gal, 104°F )
Filter material	Activated carbon fiber compact
Filtering capacity	2.2gal./min.(14.5psi 104°F) Max.3.9gal
Size	13.4inch (H) ×4.7inch (diameter)(except water supply connection)
Main unit weight	4.2lb (included twin cartridge)
Normal working pressure	7.3psi ~ 72.5psi
Maximum working temperature	104°F
Cartridge replacement period	Clean water cartridge About 1 year (replacement timing varies depending on the water quality and quantity consumed) Ceramic cartridge About 3 years (replacement timing varies depending on the water quality and quantity consumed)
Accessories of this unit	Outlet pipe (39.3inch), Water supply hose (78.7inch), Shower hose (78.7inch), Shower head, Tip-resistant ring (with suction cap), Plate for absorption, Water filter change seal, Shower bracket, Operation manual, Spanner